

Ha 2000R

Operate by remote control ha 2000R (frequency 868 MHz)

The remote control makes it possible to put the power station in modes of armament TOTAL, PARTIAL HARMS, DISARMAMENT and also to proceed to one release "panics" alarm.

Description

1. Touch

To support during 3 seconds for a TOTAL armament

2. Touch

To support during 3 seconds for a release out of alarm panics.

3. Touch


To support during 3 seconds for a PARTIAL armament HARMS.

4. Touch

To support during 3 seconds for a disarmament (to be left of a situation of TOTAL or PARTIAL armament). If alarm sound, it will stop.

5. Pilot diode

6. Compartment crushes

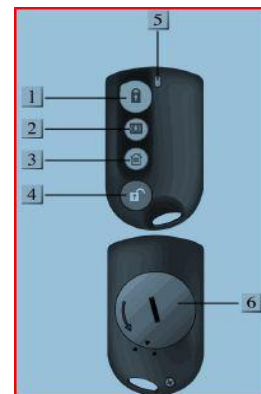

Witness of emission

If you support on one of the four keys during 3 seconds, the diode ignites to confirm the sending of the signal corresponding to the Power station.

Crush

The remote control functions with a pile Lithium "CR2032" of 3V 230 mA/h. the lifespan of the pile is of approximately 2 years. In Enlevez the lid by making it turn in the contrary direction of the needles of a watch with a coin. In Insérez the pile as indicated in the diagram below with + towards you. In Refermez it lid by making it turn in opposite direction.



Training of the remote control

I.To enter the programming method

The screen being empty, to support on OK to check that the power station is in "Disarmed" mode. From there,

Stage 1. Press on the key 

with invites, seize the Secret code Administrator:

**S m a l l P r o g t o e n t e r
C o d e A d m I n . . .**

Stage 2. Compose "0000" (Secret code "Administrator" by defect) in the 10 dry ones.

Stage 3. Support on "OK"


the following message is posted during 2 :

**d r y . S m a l l P r o g r .
C h o o s e .**

Note: To return constantly at the preceding stage, to support on .

Stage 4. Then the menu of Programming is posted.

M o d e T e s t
G é n a d j u s t m e n t s

Stage 5. Press on  to move the cursor in top or bottom, the choices being: ·

- Test mode ·
- General adjustments
- ACC +/-.

II To add Accessories

Accessories of order (remote control and off-set keyboard) and of detection (detectors PIR and of opening and domestic detectors of risks) must be the subject of a training by the power station, in order to be able to dialogue with it.

To return in learning mode of the accessories once in small the programming, Select the menu " Acc +/- " and support on OK !' following screen will appear:

T o a d d A c c.
T o m o d i f y A c c.

Stage 1: Select " To add Acc " and to support on **OK** the following screen will appear:

C l o s e b u t t o n o n
A c c. t o a d d

The power station is on standby code of training

Stage 2: Support on one of the four keys of the remote control.


Once the code of training received !' following screen will appear:

OPERATE BY REMOTE CONTROL Detected (O K?)

Stage 3: Support on **OK** the following screen will appear:

Enter its NAME + O K

Seize the name of the accessory (ex: PIERRE, max 12 characters) using the keys numbered as for a "texto" on cellphone.


NOTE: When you press on the key , the characters will pass from capital letters in tiny.

Stage 6: To support on **OK** the following screen will appear:

P I E R R E Z O N R E O 3 R
Confirm (OK?)

This screen summarizes information concerning the accessory
Support on **OK** to validate the recording of the remote control.

Your remote control is now recorded.

Press on the key return , in order to return in mode takes care.

The Désarmé message is posted, you can use your remote control.

D I s a r m e d